



SECTION J-J

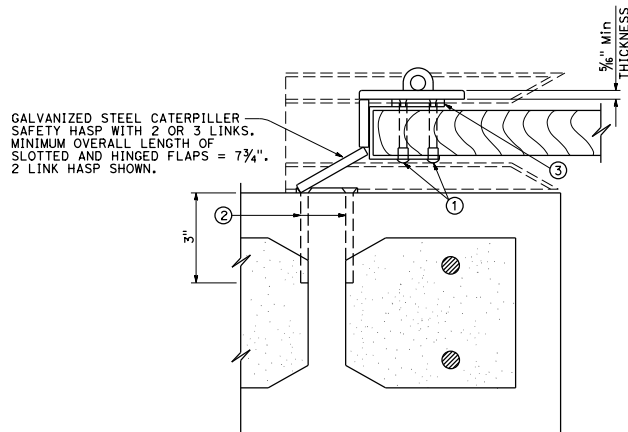

DETAIL A

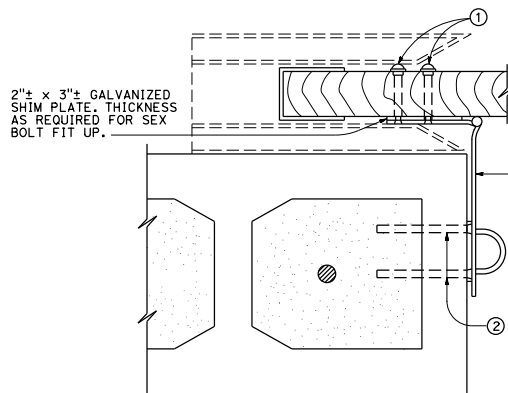

DETAIL B

NOTES:

1. Masonry anchors to be installed after the grout in the block cells has attained specified strength.
2. Contractor may submit alternative gate locking assemblies for approval by the Engineer.
3. See other sheets for gate details.

- ① 4 - SEX BOLTS WITH 1/4" - 20 FLAT HEAD CORROSION RESISTANT MACHINE SCREWS.
- ② 4 - 1/4" Ø × 3" LONG FLAT HEAD SLEEVE TYPE CORROSION RESISTANT MASONRY ANCHORS.
- ③ GALVANIZED SHIM PLATE, SIZE AS REQUIRED TO MATCH HASP STAPLE PLATE±, THICKNESS AS REQUIRED FOR SEX BOLT FIT UP.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**SOUND WALL MASONRY BLOCK
ACCESS GATE LOCKING
DETAILS**

NO SCALE

B15-14

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

October 30, 2015

PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER

Tillot Satter

No. C42892

EXP. 3-31-16

CIVIL

STATE OF CALIFORNIA